



Who we are

AMR Trading AG based in Zug, Switzerland is the integrated sales and marketing partner of a dynamically growing multi – metal Russian industrial group STUPINO, with its aluminium centre of excellence in Belaya Kalitva, south-west Russia.


With USD \$150 million of recent investment, BK produces high quality aluminum sheet and plate for a wide variety of applications, ranging from aerospace, automotive to general engineering.

BK produces a typical set of aluminium sheet and plate, as well as extrusions in all standard NHT- (5754 & 5086) and HT- (6061, 6082, 2017, and 7075) alloys in the usual tempers and dimensions and according to all common specifications.

On top of that, BK on demand is capable of producing a wide range of non-standard plate alloys.

Our Mission

- Transparency in ownership and strategy
- Integrity and respect in dealing with customers, suppliers, and employees
- Aspiration to be a supplier of choice in selected markets
- To deliver world class quality and service to our customers

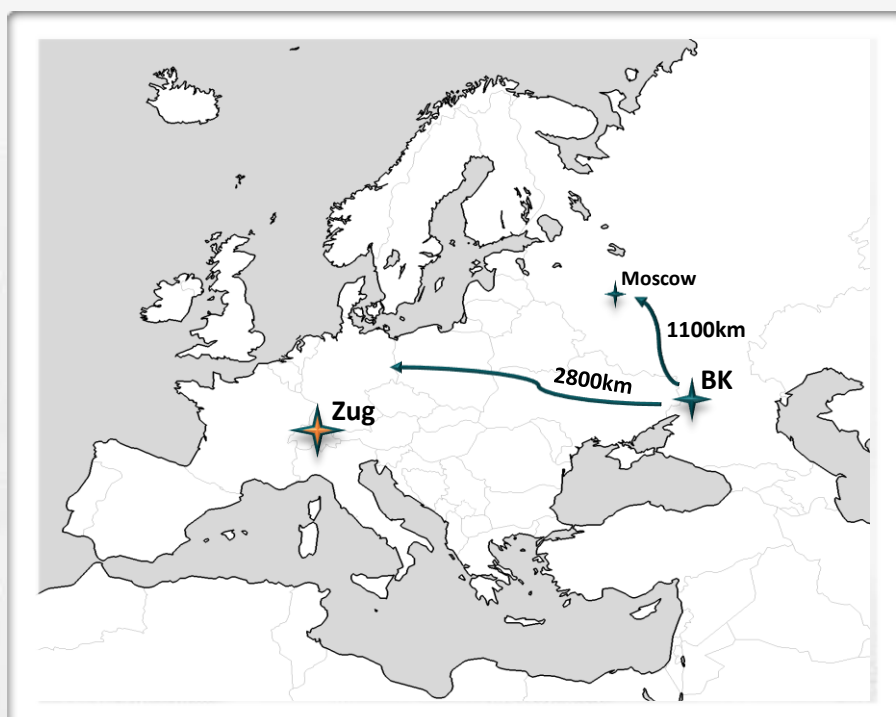

Our Manufacturing Capabilities

HT – Plate

Alloy	Temper	Dimensions (inch)			Specifications
		Thickness	Width	Length	
6061	T651	6 – 150	1,000 – 1,500	2,000 – 6,500	ASTM B 209M, ASTM B 209, AMS 4027, EN 573-3, EN 485-1, -2, -3, 4
6082	T651	6 – 150	1,000 – 1,500	2,000 – 6,500	EN 573-3, EN 485 -1, -2, -3, 4
7075	T651	6 – 150	1,000 – 1,500	2,000 – 6,500	ASTM B 209M, ASTM B 209, AMS 4045, EN 573-3, EN 485-1, -2, -3, 4
2024	T351	6 – 150	1,000 – 1,500	2,000 – 6,500	ASTM B 209, AMS-Q Q-A-250/4A, AMS 4037, EN 573-3, EN 485-1, -2, -3, 4
2014A	T451	6 - 80	1,000 – 2,000	2,000 – 6,500	EN 573-3, EN 485-1, -2, -3, 4
	T651	6 - 120	1,000 – 2,000	2,000 – 6,500	EN 573-3, EN 485-1, -2, -3, 4
2017A	T451	6 – 150	1,000 – 2,000	2,000 – 6,500	EN 573-3, EN 485-1, -2, -3, 4

NHT – Plate

Alloy	Temper	Dimensions (inch)			Specifications
		Thickness	Width	Length	
5754 5083 5086	O H111	6 – 150	1,000 – 2,000	2,000 – 6,500	ASTM B 209M, ASTM B 209, ABS, DNV, EN 573-3, EN 485-1, -2, -3
5083 5086	H32 H321 H116	6 - 25	1,000 – 2,000	2,000 – 6,500	ASTM B 209M, ASTM B 209, AMS-Q Q-A-250/6A (5083), ASTM B928/B928M, EN 573-3, EN 485 -1, -2, -3, 4, ABS, DNV
5083 5086	H112	6 - 80	1,000 – 2,000	2,000 – 6,500	ASTM B 209M, ASTM B 209, AMS-Q Q-A-250/6A (5083), ABS, DNV, EN 573-3, EN 485-1, -2, -3, 4

HT – Sheet

Alloy	Temper	Thickness	Width	Length	Specifications
7021	T6	2-4	1,000 - 1,600	1,000 - 4,500	ASTM B 209M, AMS-QQ-A-250/12 EN 573-3, EN 485-1, -2, -4
7075	T6, T651	6-6.3	1,200 - 2,000	1,200 - 1,500	ASTM B 209M, AMS-QQ-A-250/12 EN 573-3, EN 485-1, -2, -4
2017A	T4, T451	6	1,200 - 2,000	2,000 - 4,900	EN 573-3, EN 485-1, -2, -4
6061 6082	T6, T651	6-6.3	1,200 - 2,000	2,000 - 4,900	ASTM B 209, AMS 4027M EN 573-3, EN 485-1, -2, -4

NHT – Sheet

Alloy	Temper	Thickness	Width	Length	Specifications
5052	O, H22, H326	6-6.3	1,200 - 2,000	2,000- 5,000	ASTM B 209M, ASTM B 209, AMS 4016, EN 573-3, EN 485-1, -2, -4
5083	O, H116, H321, H111	5-6.3	1,200 - 2,000	2,000- 5,000	ASTM B 209M, ASTM B 209, ASTM B928 / B928M, EN 573-3, EN 485-1, -2, -4
5083	O	5-8.9	2,100 - 3000	2,100 - 3001	ASTM B 209M, ASTM B 209, ASTM B928 / B928M, EN 573-3, EN 485-1, -2, -4
5086	O, H112, H116, H22, H32, H321	6-6.3	1,200 - 2,000	2,000 - 5,000	ASTM B 209M, ASTM B928 / B928M, ASTM B 209, EN 573-3, EN 485-1, -2, -4

Tube

Product	Dimensions (mm)	Alloy	Specifications
Extruded tube	∅ 18 - 130 wall 1,5 - 20	2017, 2024, 3003, 5083, 5086, 5049, 5052, 5754, 6061, 6082, 7075	ASTM B 221 ASME SB 241 EN 755
Drawn tube	∅ 5 - 95 wall 0,75 - 5	5086, 5083, 6061	EN 754 ASTM B210 SAE AMS – WW-T-700
Extruded thin wall tube for special GE applications	∅ 6 - 10 wall 0,7 – 1,5	1050, 1070	TU 1-3-041

Rod & bar

Product	Dimensions, sections (mm)	Alloy	Specifications
Rod	∅ 100 for HT	2017A, 2014, 2024 6061, 6082, 7075	ASTM B 221 EN 755
	100 < 250 for NHT	3003, 5083, 5754, 1163	
Profile and flat bar	Profiles & flat bars S 650 mm ²	2017A, 2014, 2024 3003, 5083, 5754, 6061 6082, 7075, 1561, 1163	ASTM B 221 EN 755
	Rack type profiles S 2000 mm ²		
	Long profiles S 600 mm ²	1163	TU-83-69-89

Types of rolling mills

Hot rolling mill «Quarto-2800»

Cold rolling mill «Quarto-2800»

Cold rolling mill «Quarto-3120»

Heat treatment equipment



Supply Logistics


Min. delivery size: 20mt

Min. item size: 2mt

Production time (est.): 6 – 7 weeks

Delivery time Europe: 2 weeks

Total time: 8 – 9 weeks

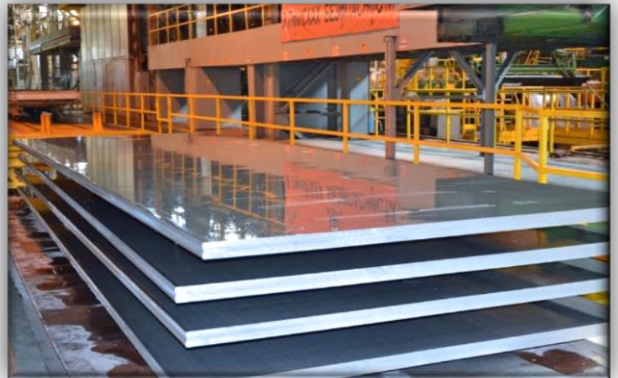

Approvals

ASTM-B209, QQ-A-250, ISO-9001, AS-9100,

ISO-14001, NADCAP (US testing)

DNV (5083 plate in temper O, H112, H116, H321)

EN-485 (1-3), EN-573



Your Contacts

Alex Tattersall CEO	E: alex.tattersall@amr-trading-ag.com T: +41 41 511 01 92 M: +41 79 513 25 69
Ekaterina Belskaya Operations Manager	E: ekaterina.belskaya@amr-trading-ag.com T: +41 41 511 01 94